



This PDF is presented by Super Warehouse. All copyrights and trademarks are the property of their respective holders.

We are here to serve you:

For further information or if you would like to purchase this product, please call us during business hours Monday-Friday from 6am-6pm PST; or you can purchase 24/7 on our site.

Contact Info:

Visit us on the web: <http://www.superwarehouse.com>

Email an expert sales associate: sales@superwarehouse.com

Call Us Toll Free: 1-800-814-5410 Intl: 1-619-216-3465

Press Ext. 1 for Sales

About Super Warehouse:

- Over 50,000 brand name computer hardware and software products
- Discount prices
- Friendly and knowledgeable staff
- Five star customer service
- Free shipping on select orders
- Proudly serve business, education, and government clients (we ship to APO/AP and AE addresses)
- 16 warehouses throughout the country
- 99% of orders shipped the same day
- Fedex overnight and even same day shipping available
- In business since 1997
- CNET certified merchant
- Clients we have served include virtually all fortune 500 companies, the US military, thousands of schools, colleges and universities, and municipal, state, and federal government organizations

ViewSonic VP211b LCD Display

21.3" ThinEdge™ Ultra-Slim Bezel Display



ViewSonic
See the difference.



Experience the freedom of this ultra-slim fully adjustable 21.3" LCD.

Free your imagination with the VP211b premium large-screen LCD display. Framed by the state-of-the-art **THINEDGE ULTRA-SLIM BEZEL**, the VP211b showcases an expansive 21.3" picture with XtremeView® wide viewing angles, UXGA 1.92 megapixel resolution, ClearMotiv™ broadcast-quality video response technology, and pure HDTV high-scan 720p compatibility. Free from thick obtrusive bezels and infinitely configurable with **HEIGHT/PIVOT ADJUSTMENTS, DIGITAL/ANALOG**

INPUTS AND USB 2.0 high-speed connections, the VP211b LCD agilely displays your work or play any way you want to see it. Perfect for multiple-display installations or single workstations, the VP211b is the ultimate professional LCD display.



ThinEdge design is ideal for multi-panel setups. Four unit panel-module-only (without base) multi-packs available.

Immaculate pictures, ultimate versatility and unlimited possibilities.

❖ ThinEdge maximizes your productivity

The ultra-slim 0.85" bezel design enhances your visual experience with clean, minimalist borders around the active image area. Suitable for tiling and stacking.

❖ Ideal for multiple-monitor setups

ThinEdge minimizes bezel gaps between panels for a virtually continuous viewing area in multiple-panel setups.

❖ Pivot, height and wall-mount versatility

VESA® wall-mount interface and detachable base for ergonomic flexibility with pivot, height, tilt and swivel adjustments.

❖ **OPTISYNC** analog/digital inputs and integrated USB hub expand your connectivity

Includes one DVI-I (analog or digital capable) and one analog input for wide compatibility with, and optimization of, a variety of video sources. Integrated USB 2.0 high-speed hub enables unlimited connectivity options.

❖ Integrated power supply with hard power switch

❖ TCO'99 and ENERGY STAR®

❖ 1600x1200 native resolution

Incredible image detail for video and graphics. Sharpness function improves graphics and text at lower resolutions.

❖ High brightness and contrast

250-nit brightness (typ) and 600:1 contrast ratio (typ) for rich images.

❖ HDTV-720p ready

❖ ClearMotiv technology

Super-fast 25ms video response for broadcast-quality full motion video at 40 FPS.

❖ Image clarity from all directions

XtremeView performance features ultra-wide 170° viewing angles horizontally and vertically.



ThinEdge
SUPER WAREHOUSE

ViewSonic VP211b LCD Display

21.3" ThinEdge™ Ultra-Slim Bezel Display




Pivot feature saves time

Spend less time scrolling long documents. Simply rotate your screen from landscape to portrait.



Wide-travel height adjustment

With over 4 1/4 inches of travel, this LCD fits just right.

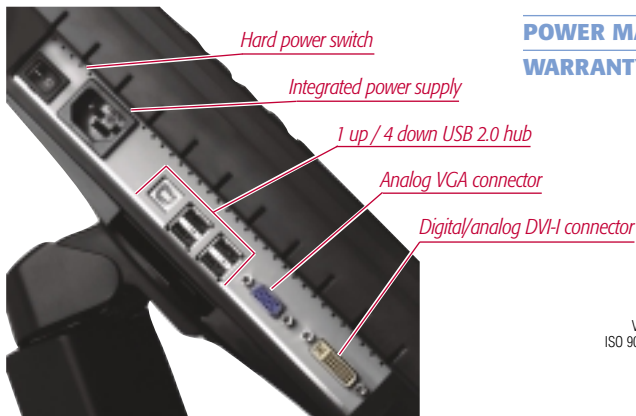

LCD PANEL

Type	21.3" color TFT active matrix UXGA LCD
Display Area	17.0" (horizontal) x 12.8" (vertical); 21.3" diagonal
Optimum Resolution	1600x1200
Contrast Ratio	600:1 (typ)
Viewing Angles	170° horizontal, 170° vertical
Response Time	25ms (typ)
Brightness	250 cd/m ² (typ)
Glass Surface	Anti-glare

VIDEO INPUT

Analog	RGB Analog (75 ohms, 0.7/1.0 Vp-p)
Digital	DVI-I (TMDS, 100 ohms, or analog capable)
Frequency	Fh: 30~92kHz, Fv: 50~85Hz
Sync	H/V separated, composite, sync-on-green (TTL)

COMPATIBILITY

PC	VGA up to 1600x1200 non-interlaced
Mac**	Power Mac™ G3/G4 up to 1600x1200
HDTV	480p, 720p

CONNECTOR

Analog	15-pin mini D-sub
Digital	Digital DVI-I
USB	V 2.0, Up stream (B type) x1; Down stream (A type) x4
Power	3-pin plug (CEE22)

POWER

Voltage	AC 100-240V (universal), 50-60Hz
Consumption	70W (typ)

CONTROLS

Basic	Power, 1, down, up, 2, soft power
OnView®	Auto image adjust, contrast, brightness, input select, color adjust (9300K, 6500K, 5400K, 5000K, user color), information (H/V frequency, resolution, model number, serial number, web site), manual image adjust (H. size, H/V position, fine tune, sharpness, scaling), setup menu (language, resolution notice, input priority, OSD position, OSD timeout, OSD background, OSD pivot), memory recall

OPERATING CONDITION

Temperature	32-104° F (0-40° C)
Humidity	10-90% (non-condensing)

DIMENSIONS (W x H x D)

Physical	476mm x 492mm x 267mm (w/ stand)
	18.7" x 19.4" x 10.5" (w/ stand)
	476mm x 369mm x 70mm (w/out stand)
	18.7" x 14.5" x 2.8" (w/out stand)

WEIGHT

Net	20.5 lbs. (9.3 kgs) w/stand; 11.5 lbs. (5.2 kgs) w/out stand
Gross	26.5 lbs. (12.0 kgs) w/stand; 13.2 lbs. (6.0 kgs) w/out stand

REGULATIONS

	UL, cUL, FCC-B, CB, CE, ENERGY, NOM, TUV/GS, TUV Ergo, (covers ISO13406-2 and MPR II), TCO'99, NEMKO, SEMKO, DEMKO, FIMKO, GOST-R, HYGIENIC, SASO, PCBC, VCCI, BSMI, CCC, PSB, C-TICK, TUV-S
--	--

POWER MANAGEMENT

Meets TCO'99 and ENERGY STAR® standards

WARRANTY

Three-year limited warranty on parts, labor and backlight.



FM 40187



EMS 40968

ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by the British Standards Institution.



ViewSonic®
See the difference.®

ViewSonic Corporation • 381 Brea Canyon Road, Walnut, CA 91789
Phone (800) 888-8583 or (909) 444-8888 • In Canada (866) 262-1967 • Fax (909) 839-7922 • SalesInfo@ViewSonic.com • ViewSonic.com

*Adapter may be required. Analog adapter available from ViewSonic. Specifications subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. Corporate names, trademarks stated herein are the property of their respective companies. Copyright © 2003 ViewSonic Corporation. All rights reserved. [11117-01B-06/03] VP211b-1