



This PDF is presented by Super Warehouse. All copyrights and trademarks are the property of their respective holders.

**We are here to serve you:**

For further information or if you would like to purchase this product, please call us during business hours Monday-Friday from 6am-6pm PST; or you can purchase 24/7 on our site.

**Contact Info:**

Visit us on the web: <http://www.superwarehouse.com>

Email an expert sales associate: [sales@superwarehouse.com](mailto:sales@superwarehouse.com)

Call Us Toll Free: 1-800-814-5410 Intl: 1-619-216-3465

Press Ext. 1 for Sales

**About Super Warehouse:**

- Over 50,000 brand name computer hardware and software products
- Discount prices
- Friendly and knowledgeable staff
- Five star customer service
- Free shipping on select orders
- Proudly serve business, education, and government clients (we ship to APO/AP and AE addresses)
- 16 warehouses throughout the country
- 99% of orders shipped the same day
- Fedex overnight and even same day shipping available
- In business since 1997
- CNET certified merchant
- Clients we have served include virtually all fortune 500 companies, the US military, thousands of schools, colleges and universities, and municipal, state, and federal government organizations

# KX-P2130 24-Pin Dot Matrix Printer




## Features:

- 250 cps maximum draft print speed for high productivity
- Prints in 7 colors with KX-PCK12 & KX-P165 ribbon (color option kit)
- EZ Set Operator Panel/Setup Disk Controls more than 20 functions
- Built-in sheet feed accommodates up to 20 single sheets
- 11.7" max. paper width enables landscape orientation of 8.5" x 11" paper for greater printing flexibility

All product/brand names are trademarks or registered trademarks of their respective holders. Specifications subject to change without notice. Product may be subject to export control regulations. Copyright © 1997 Matsushita Electric Corporation of America. All rights reserved.

O n l i n e   S p e c   S h e e t

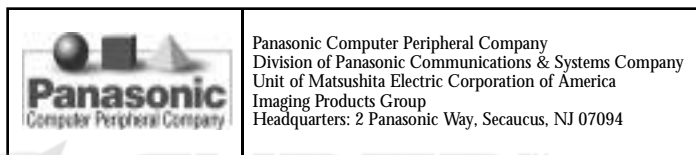

www.panasonic.com/alive

## KX-P2130 Specifications

Print Method	Impact Serial Dot Matrix		
Printhead and Life	24-pin (0.2 mm wire diameter), 200 mil strokes; 100 mil chr (draft)		
Print Direction	Bidirectional (user selectable unidirectional) logic seeking; color: unidirectional**		
Print Speed (characters per sec)		Draft	LQ
	Micron	250 cps	83 cps
	Elite	200 cps	67 cps
	Pica	167 cps	56 cps
Letter Quality Fonts	Courier, Prestige, Bold PS, Script, Sans Serif, Roman, OCR-B		
Character Matrix (HxV)	Draft 9x24; LQ 30x24		
Printing Sizes	5,6, 7.5,8.5,10, 12,15,17, & 20 cpi & PS		
Characters Per Line	40,48,60,68,80, 96 120,137, & 160 cpl		
Lines Per Inch	3,4,6,7.5, 8, 12, n/60, n/i 80, n/360 & programmable lpi (n/72 & n/216 IBM only)		
Character Sets	96 ASCII characters, 96 italic ASCII characters 33 International characters -- 14 language sets & legal 158 IBM special characters 38 multi-lingual characters		
Bit Image (matrix)	360x360 dots per inch		
EZ Set Operator	Quick access to functions including: Font, Panel Tear off, Super quiet mode, Micro line feed, & Paper load/park		
Setup Disk	3-1/2" disk controls all printer functions. Includes a command reference program and a Windows* version 3.1 driver.		
Line Feed Time	Approx. 90 msec (with 1/6 inch line feeding)		
Tractor Feed	Push		
Paper Feed	Path:	Method:	
	Top	Friction (single sheet or multiple single sheets) Cut Sheet Feeder (optional)	
	Rear	Push Tractor (adjustable)	
Paper Specifications	Continuous: 4.0 to 10.0 inches, 16 to 24 lbs. Single Sheet: 4.0 to 11.7 inches, 14 to 24 lbs. Envelopes: #6 & #10 Copies: Up to original +3 non carbon copies Thickness: Maximum thickness less than 0.013 in.		
Emulations*	Epson LQ-860. IBM Proprinter X24E		
Interface	Centronics parallel		
Buffer	14K (standard), additional 32K (optional)		
Noise Level	46.5 dBA (std quiet mode), 43.5 dBA (super quiet mode)		
Environment	Operating: 50°F to 95°F 20 to 80% humidity		
	Storage: -4°F to 140°F; 10 to 90% humidity		
Reliability	4000 hrs MTBF @ 25% duty cycle		
Ribbon	Black seamless ribbon; 3 mil chr draft/rolling ASCII (KX-P160); 4 color seamless ribbon; Up to 700,000 chr draft/rolling ASCII (KX-P165; requires KX-PCK12)		
Warranty	Limited 2 years -- parts & labor		
	See your dealer for details		
Dimensions & Weight	17.1(w) x 12.4(d) x 5.8(h) inches; 11 lbs.		
Power Consumption	Standby 5W; maximum 160W		
Options	Automatic Single Bin Cut Sheet Feeder; 50 sheets (KX-PT12) 32K Expansion Buffer Chip (KX-P44) Color Kit (KX-PCK12, includes KX-P165 color ribbon)		

