



This PDF is presented by Super Warehouse. All copyrights and trademarks are the property of their respective holders.

We are here to serve you:

For further information or if you would like to purchase this product, please call us during business hours Monday-Friday from 6am-6pm PST; or you can purchase 24/7 on our site.

Contact Info:

Visit us on the web: <http://www.superwarehouse.com>

Email an expert sales associate: sales@superwarehouse.com

Call Us Toll Free: 1-800-814-5410 Intl: 1-619-216-3465

Press Ext. 1 for Sales

About Super Warehouse:

- Over 50,000 brand name computer hardware and software products
- Discount prices
- Friendly and knowledgeable staff
- Five star customer service
- Free shipping on select orders
- Proudly serve business, education, and government clients (we ship to APO/AP and AE addresses)
- 16 warehouses throughout the country
- 99% of orders shipped the same day
- Fedex overnight and even same day shipping available
- In business since 1997
- CNET certified merchant
- Clients we have served include virtually all fortune 500 companies, the US military, thousands of schools, colleges and universities, and municipal, state, and federal government organizations

KX-P3626 24-Pin Dot Matrix Printer




Features:

- 300 cps maximum draft print speed
- 16.5" carriage allows for a wide variety of paper widths
- User-selectable push/pull tractor
- Rear, bottom, front & top feeds provide a wide variety of paper paths

All product/brand names are trademarks or registered trademarks of their respective holders. Specifications subject to change without notice. Product may be subject to export control regulations. Copyright © 1997 Matsushita Electric Corporation of America. All rights reserved.

O n l i n e S p e c S h e e t

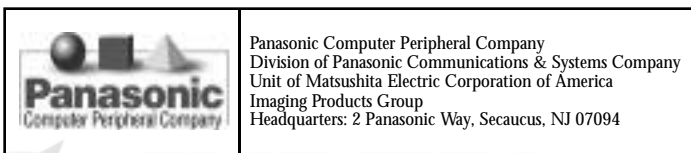

www.panasonic.com/alive

KX-P3626 Specifications

Print Method	Impact Serial Dot Matrix		
Printhead and Life	24-pin (0.2mm wire diameter), 200 mil strokes; 100 mil chr (draft)		
Print Direction	Bidirectional (user selectable unidirectional) logic seeking		
Print Speed (char per sec)	Draft	LQ	SLQ
	Micron	300 cps	100 cps
	Elite	240 cps	80 cps 40 cps
	Pica	200 cps	66 cps 33 cps
Internal Scalable Fonts	Courier, Prestige, Bold PS, Script, Sans Serif, Roman; From 8 to 96 point size.		
Internal Bitmapped Fonts	Courier, Prestige, Bold PS, Script, Sans Serif, Orator, Roman, OCR-B, Super LQ		
Char. Matrix (H x V)	Draft 9x24; LQ 30x24; SLQ 30x48		
Printing Sizes	5,6, 7.5,8.5,10,12,15, 17, & 20 cpi & PS		
Characters Per Line	68, 81,102,116,136,163, 204, 233 & 272 cpl		
Lines Per Inch	1, 1.5,2,2.5,3,4,4.5,5,6, 7.5,8,9,10,12, n/60 n/180, n/360 & programmable lpi (n/72 & n/216 in IBM mode only)		
Character Sets	96 ASCII characters, 96 italic ASCII characters, 33 International characters, 14 language sets & legal, 33 Italic international characters 14 language sets & legal, 158 IBM special characters - sets, 1 & 2; 38 Multilingual characters		
Bit Image (matrix)	360x360 dots per inch		
EZ Set Operator Panel	16 Character LCD controls all printer functions		
Setup Disk	3.5" disk controls all printer functions. Includes a Command Reference program and a Windows 3.1 printer driver		
Line Feed Time	Approx. 90 msec (with 1/6 inch line feeding)		
Tractor Feed	User selectable push or pull, swivel mount, flat belt		
Paper Feed	Path:	Method:	
	Front	Friction Tractor (adjustable)	
	Rear	Push Tractor (adjustable)	
	Bottom	Pull Tractor (adjustable)	
	Top	Cut Sheet Feeder (optional)	
Paper Specifications	Continuous: 4.0 to 15.5 in., 18 to 24 lbs. (pull); 16 to 24 lbs.(push), Single Sheet: 4.0 to 16.5 in., 14 to 24 lbs., Envelopes: #6 & #10, Copies: Up to original + 4 non carbon copies, Thickness: Maximum thickness less than 0.013 in.		
Emulations*	Epson LQ-1170, IBM Proprinter XL24E		
Interface	Centronics parallel, RS-232C serial (optional)		
Buffer	40K (standard)		
Noise Level	46.5 dBA (std. mode), 43.5 dBA (super quiet mode)		
Environment	Operating: 50°F to 95°F; 30 to 80% humidity		
	Storage: - 4°F to 140°F; 10 to 90% humidity		
Reliability	6000 hrs MTBF @ 25% duty cycle		
Ribbon	Black seamless ribbon; 5 mil chr draft/rolling ASCII(KX-P170)		
Warranty	Limited 2 years - parts & labor See your dealer for details		
Dimensions & Weight	23.2 (w)x16.0 (d)x6.8 (h) inches; 33.7 lbs.		
Power Consumption	Standby 10W; Max 150W		
Options	Automatic Single Bin Cut Sheet Feeder (KX-P38) RS-232C with Current Loop Serial Interface (KX-PS13) RS-232C Non Current Loop Serial Interface (KX-PS14)		

