



## INSTALLATION INSTRUCTIONS

# PSB-2241 LCD DISPLAY MOUNTING BRACKET

Prior to assembly, unpack carton completely and verify contents.

If you are missing any of the following components, please contact Customer Service at 1-800/582-6480

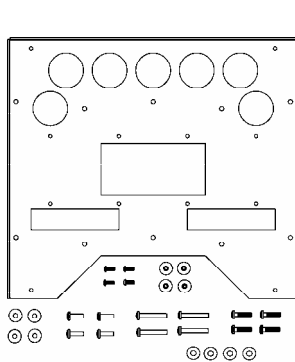


Figure 1

- (1) LCD Interface Bracket
- (4) 10-24 x .5" Button Head Cap Screws
- (4) M6 x 40mm Phillips Head Cap Screws
- (4) .740 OD x .250 ID x .250 Round Nylon Spacer
- (1) M4 Allen Key

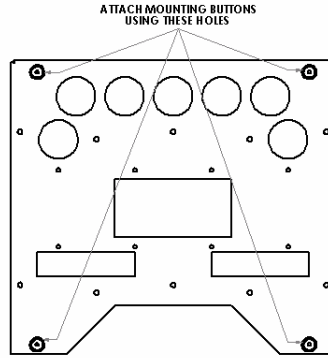


Figure 2

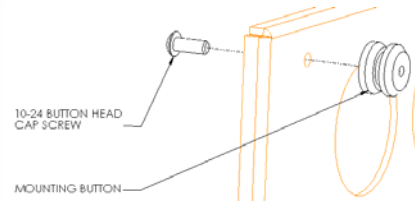


Figure 3

- (4) Mounting Buttons-Tapped 10-24
- (4) M6 x 25mm Phillips Head Cap Screws
- (4) M6 x 20mm Button Head Cap Screws
- (1) 1/8" Allen Key
- (4) .750 OD x .323 ID x .125 Round Nylon Spacer

BEFORE PROCEEDING, READ INSTALLATION INSTRUCTIONS COMPLETELY

## **CAUTION!** LCD DISPLAYS ARE EXTREMELY FRAGILE.

1. Using a 10-24 button head cap screw inserted from back side of bracket, secure mounting button, with chamfered hole of mounting button (larger surface) facing bracket, to bracket (four places) (see Figure 2 & Figure 3).
2. Place 1/4" Nylon spacers on mounting holes, aligning hole pattern on brackets with pattern on back of the display (see Figure 4 & Figure 5). If applicable, remove rubber caps over mounting holes before attempting to attach bracket. Note: 1/8" SPACERS MAY NEED TO BE USED WITH THE 1/4" SPACERS FOR EXTRA CLEARANCE.
3. Using M6 screws, secure brackets to the display. Use the proper length of screw for your display. Do not over tighten screws.
4. With the aid of another person, lift the display up to the Chief Mount, aligning buttons on mounting bracket with slots in the Chief Mount.
5. Lower safety latch on the Chief Mount to secure the display, making sure latch is completely engaged.

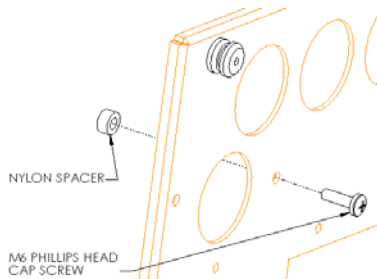


Figure 4

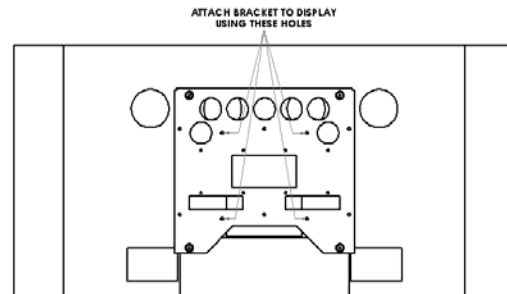


Figure 5